



AX Series

D9068E 5PT DIGITAL ALARM COMMUNICATOR TRANSMITTER



Unique Features:

- ANSI/UL 864 9th Edition Listed
- AX Series Intelligent FACP Powered
- 5 User Programmable Input Points
- Supports Multiple Reporting Formats
- Dual Phone Line Interface
- 100 Event History Buffer

Description:

The D9068E 5pt Digital Alarm Communicator Transmitter (DACT) is a completely contained communicator for use with Advanced Fire Systems AX Series Intelligent Fire Alarm Control Panels. The D9068E Communicator can monitor up to 5 supervised dry contact inputs configurable for one of seven types of conditions: Fire Alarm, Waterflow Alarm, Supervisory, Monitor Alarm, System Fault, AC Failure and Low Battery.

The D9068E Communicator is supervised with a hardware watchdog circuit. Failure of the control program results in a hardware reset within two seconds. The on-board trouble relay releases for the duration of the reset (the relay is normally held energized). The D9068E's EEPROM memory, input points, and phone lines are automatically tested periodically. The EEPROM checksum is verified every 10 minutes. If the EEPROM checksum fails, a trouble condition is locally annunciated and a trouble report is sent to the Central Station.

A user interface, FMR-DACT-KEYPAD LCD, is available for programming and troubleshooting the D9068E Communicator. The LCD Keypad connects to a five-pin connector (optional bus interface) located on the D9068E PCB. An older version Liquid Crystal Display (LCD) Remote Keypad D7033 can also be used to perform this functionality.

Reporting Formats

The D9068E Communicator supports five reporting formats: Modem IIIa2, Contact ID, SIA110, SIA300, and 4/2.

Report Routing

There are six different report groups that can be routed to one of four phone settings. These report groups consist of non-supervisory alarms, supervisory alarms, alarm restorals, resets, supervisory restorals, tests and troubles, and trouble restorals. A reset report is sent when the D9068E Communicator resets from any off normal condition.



3118002NYM-001B



Features:

- Multiple Communications Formats
 - Modem IIIa2
 - Contact ID
 - SIA 110
 - SIA 300
 - 4/2
- Dual Phone Lines
- Separate Trouble LEDs for Line 1 or Line 2 faults, Heartbeat/Watchdog and General Trouble
- N.O. Contact Inputs, Fully Programmable
- 100 Event History Buffer

Product Data Sheet

Phone Line Selection

The D9068E Communicator follows a pre-determined sequence to select between the phone lines. It also implements the new NFPA requirements for alternation of phone lines during test reporting. The D9068E Communicator maintains a variable that selects either Phone Line 1 or Phone Line 2 for automatic test reports. After each successful test report, the variable switches to select the other phone line.

Communication Failed Indication

The D9068E Communicator indicates a communication failure after ten attempts to communicate are completed without success. This causes the trouble output to activate and report the fault to the AX Series Intelligent Fire Alarm Control Panel.


History Buffer

The D9068E Communicator has an on-board history buffer that retains up to 100 events. Each event is tagged with the date and time of occurrence. This buffer can be viewed via the FMR-DACT-KEYPAD LCD (or a D7033 LCD Remote Keypad). When the buffer is full, old events are discarded (first in - first out) to make room for new events.

Lightning Suppression

MOVs and spark gaps are built into the D9068E Communicator to suppress lightning surges and static discharges on input and telephone interface circuits.

Ax-CTL-1L Single Loop Intelligent Fire Alarm Control Panel – D9068 DACT Interface

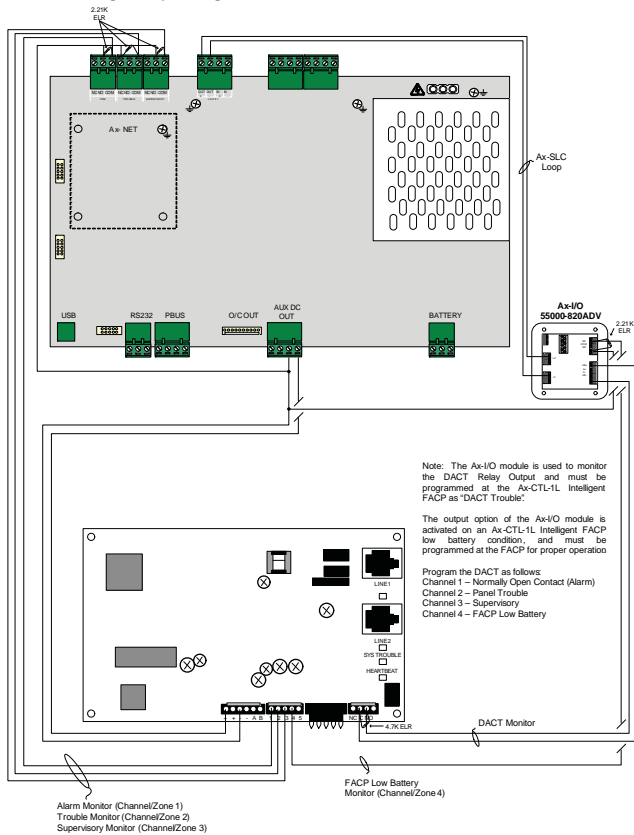

D9068E 5pt DACT Specifications	
Voltage	10.2 - 28 VDC
Operating Current	109 mA
Quiescent Alarm	125 mA
Environment	Indoor, dry
Temperature (operating)	32°F - 120°F (0°C - 49°C)
Dimensions (HxWxD)	7.75 in. x 5.1 in. x 2.5 in. (19.7 cm x 13.1 cm x 6.4 cm)
Weight	3.1 lb (1.4 kg)

Ordering Information

D9068E	D9068E 5pt Digital Alarm Communicator Transmitter with enclosure
DACT-PRG	D9068E, FMR-DACT-KEYPAD Programming LCD and Keypad



100 South Street, Hopkinton, Massachusetts, USA MA 01748

Tel: 508.453.9995 ■ Fax: 508.453.9996 ■ www.afsi.us.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.